

relating to several of the most successful :-No. of gallons per minute Montgomery st. well . 100 Harris & Kuhn . 350 Havemeyer & Moller 350 John Harrison 100 Ockershausen 100 Dudley & See 100 Tatham & Brothers 100 John Taylor 100 Howell & Co. (not now in use) . 130

dollars. As the actual statistics are of con-

siderable importance, we present the following

Total number of gallons per minute 1430, after making all allowances.



Inventors, and Manufacturers

TWELFTH YEAR

## PROSPECTUS OF THE SCIENTIFIC AMERICAN.

This work differs materially from other publications eingan ILLUSTRATED PERIODICAL, devoted chief ly to the promulgation of information relating to the ya risus Mechanic and Chemic Arts, Industrial Manufac tures, Agriculture, Patents, Inventions, Engineering, Millwork, and all interests which the light of PRACTICAL SCIENCE is calculated to advance. The SCIENTIFIC AMERICAN is printed once a

week, in convenient quarto form for binding, and presents an elegant typographical appearance. Every num her contains Bight Large Pages, of reading, abundantly illustrated with ORIGINAL ENGRAVINGS-all them engraved expressly for this publication.

All the most valuable patented discoveries are delinea. ted and described in its issues, so that, as respects inven tions, it may be justly regarded as an ILLUSTRATED REPERTORY, where the inventor may learn what has been done before him, and where he may bring to the world a KNOWLEDGE of his own achievements.


REPORTS OF U.S. PATENTS granted are also published every week, including Official Copies of all the PATENT CLAIMS. These Claims are published in the Scientific American in advance of all other pa-

Mechanics, Inventors, Engineers, Chemists, Manufacturers, Agriculturists, and People of every Profession in Life, will find the SCIENTIFIC AMERICAN to be of great value in their respective callings.

Its counsels and suggestions will save them Hundreds of Dollars annually, besides affording them continual source of knowledge, the experience of which is be wond pecuniary estimate.

Much might be added in this Prospectus, to prove that the SCIENTIFIC AMERIC AN is a publication which every Inventor, Mechanic, Artisan, and Engineer in the United States should patronize; but the publication is so thoroughly known throughout the country, that we refrain from occupying further space. TERMS OF SUBSCRIPTION\_\$2 a year, or \$1 for six

## months. CLUB BATES. Copies for Six Months. 84 88 88 815 Five Copies for Twelve Months, Ten Copies for Six Months. Ten Copies for Twelve Months, Fifteen Copies for Twelve Months, 822 Twenty Copies for Twelve Months 828 For all Clubs of 20 and over, the yearly subscription sonly \$1.40. Post-pay alletters, and direct MUNN & CO. 128 Fulton street. New York

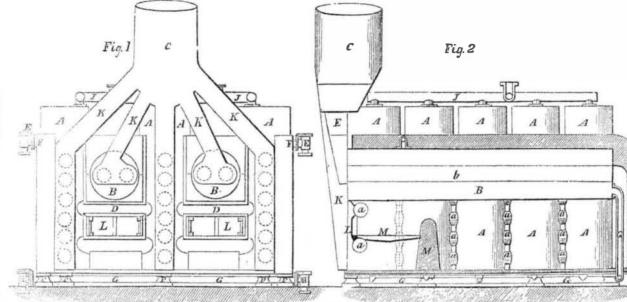


The novel arrangement of all the parts, in | lem to present the most and best arranged | for readily obtaining access to every part to the boiler patented by Mr. John Armstrong, heating surface at the least expense, would be conduct the repairs which, to a greater or less of New Orleans, La., in December last, is quite a difficult one, and of itself might ad- | extent are continually required, so far confuses represented quite clearly in the accompany- mit of a great variety of solutions, but in fact the subject, that there now exists almost as ing engravings.

tory of steam engineering, the construction of probably never occur to the merely specula- manufacturers to pay for, or firemen to attend. the boiler, the part in which all the force is generated, (generally that of the most expense, and always that of the most danger reducing the quantity and weight of water, avoid, so far as possible, all objections, and in case of imperfection,) has been a subject of might have been anticipated without expe- especially to provide against deposits of mud discussion among all the parties interested, rience, but the necessity of providing for on the heating surfaces, a point which parties

the matter is much more complexed by the many favorite varieties of boilers as there are Since the very earliest period, in the his- introduction of other elements, which would constructors to build, steamboat owners or tive student. The necessity in many situations, as in locometives and steamboats, of consists of a combination of parts intended to which has yet in nowise abated. The prob- easily cleaning out in many situations, and using the water of any riv & flowing through

Mr. Armstrong's boiler or steam generator

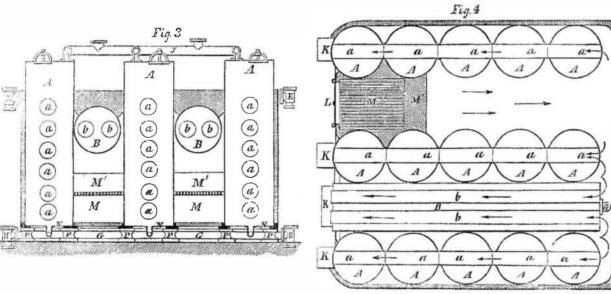

clear and concise, may be given in description.

The object of my invention, as representpossessing all the advantages of flued boilers in the proportions of heating surfaces to cubic plain cylindrical boilers in facility for cleaning and accessibility to all parts for repairing, and to possess the desirable quality of not having any portion of its heating surface exposed on its water side to receive the sedimental deposits of the water; the bottom of the boiler on which the deposits fall, being at a point below the fire, and not exposed to it.

To accomplish the object of my invention as above stated, I arrange three rows of ver-

alluvial deposits, and especially that of the ponding to the size of boiler required; each | J, on the top end; E is the check valve of the row of vertical cylinders, A A A A A. The space between each row of cylinders, I make sufficient to form at one end the furnace, M. The top of the space between the rows of vertical cylinders I close by a common double flued boiler, B, the top of which is in in one chimney, C. the same horizontal plane as the top of the flues, a, in the vertical cylinders. The verti-

Mississipp:, know well how to appreciate. cylinder, A, having a series of horizontal through which the feed water is admitted, and The language of the inventor, which is very flues, a, laying in the vertical plane, cutting | H is the blow-off valve through which the the centers of all the vertical cylinders in salt or muddy water is discharged. Each each row, and the flues in all the cylinders | cylinder stands on two pedestals, P P, and laying in one series of horizontal planes, so has the usual man-hole in the top head. The ed in the engravings, is to construct a boiler that with the cylinders of one row standing three front cylinders of the three rows, are contiguous, or in contact with each other, a connected by two large pipes, D D, which series of flues will be formed, a a a a a a, ly- form a part of the fire front of the furnaces, contents of water, and all the advantages of ing in a vertical plane through, and the length and the bearer for one end of the grate bars. The flames or heated gases pass along between the rows of vertical cylinders, and return through the flues of the cylinders and those of the horizontal boiler, and discharge into the breechings, KKKKK, which all unite

By thus arranging the heating surface in vertical cylinders with the heat applied to all cal cylinders are all connected together in sides of them, I utilize a much larger proportheir water spaces by the pipes, G, on the tion of the boiler surface than is usually done tical cylinders, A, in size and number, corres- bottom, and in their steam space by the pipe, in any other form of boiler, there being no