disease.

Scientific American.

Science and Art.

Electricity for Discovering the Seat of Disease, Dr. Holland, of the New Grafenburg Water Cure Establishment, Oneida county, N. Y., informs us that he has made use of electricity as a remedical agent during the last ten years, and has reduced it to such scientific principles that he readily describes every form of disease, without interrogating the patient. He makes the patient take hold of one pole of the battery, and himself the other, then he passes his hand over his body, forming the circle, and thus by the peculiar sensations produced, discovers the seat of

Fail of a Suspension Bridge.

The iron suspension bridge which spans the Genesee River at Rochester, fell on the 21st ult. from the weight of snow on it. The bridge was only finished last summer, and cost over \$28,000. It was constructed between iron towers standing on the banks. They were built of cast iron cylinders, bolted together, and standing on high banks, 235 feet above the water. The road-way was 200 feet above the water, and proceeded in almost a straight line from the top of the high bank on one side, to the other. The cables were 780 feet long, and the entire length of the bridge was over 700 feet. It was calculated to sustain a weight of 2,000 tuns. It spanned the Genesee river below the Falls. The metal, it is stated, appears to be defective. The load that was on it when it fell did not amount to 100 tuns.

The Frigate Nlagara.

This, the largest and believed to be the best of the new steam frigates, made her trial trip last week. With all sails set, and the screw making 36 revolutions per minute, she made eleven knots per hour. It is reported that with steam only, she ran at the rate of 10 1-2 knots per hour, with 42 revolutions of the propeller; with 32 revolutions, her speed was seven knots per hour. The Niagara has sailed to England, and will assist in laying down the Transatlantic Telegraph Cable. Thus far she has not done any very extraordinary feat in sailing or steaming; her machinery is new, but it is hoped she will yet give a better account of herself.

Sarven's Patent Wood Bending Machine.

The bending of wood and causing it to retain its bent condition as tenaciously as if it had grown in that form, is a feat every day performed in the ordinary course of many varieties of business, but means for producing exactly the desired curve in sticks so constrained are far less common, if indeed they have before existed in any convenient and really practicable form. In the most common of such devices the sticks are simply subjected to a sufficiently strong transverse strain, and so held, and by this means the wood, if uniform in strength and rigidity, will bend into a tolerable approach to the arc of a circle, or more strictly into the figure termed in mathematics "the elastic curve," the bend being greatest in the middle and diminishing toward each end. Other forms may be approximated to by applying the forces at different points, but the device here illustrated is a systematic, rapid and convenient means of compelling sticks to assume precisely any and to retain such flexure until cold. For this as in every other bending device, it is presses firmly against the timber, the frame is necessary first to boil or steam the wood, a process which destroys its "life" somewhat, and injuriously affects its durability, but both these effects are comparatively slight, and the heat and moisture appears indispensable to the bending, as also to the retaining of the shape after the bent form is attained. This machine is not intended for very large stuff, and therefore has no such provision for end pressure as are found in some of the machines for bending heavy sticks, which we have beore noticed.


A patent for this machine was granted to

dles, and in short curves of any ordinary description that lie in a plane.

Figure 1 represents the bending fram the other, carrying with them the roller, J, by cessary to remove one roller for the purpose

adapted to bending fellies for wheels, bows | means of the slides, G G and H H. Figure 3 for carriage tops, shafts at heel, poles, seat is a top view of bending frame, showing the pieces, sleigh runners, sleigh fenders, goose hand wheel, K, at one side; L L are openings necks and body pieces for sleighs, plow han- in side lever bars, on either of which points the frame is made to revolve, according to the size of the mold, or the curve it is desired to egive the timber; J is a bending roller, of which consisting substantially of side lever bars, B | there is a series, made smooth or with any de-B, and plated cross bars, C C. Figure 2 is a sired number of flanges, according to the side view of lever bars; D D are recesses to number and size of pieces to be bent at one receive the cross bars; one cross bar directly operation, by which means every piece is bent opposite the other, allowing space between for perfectly true, being free from windings to the roller guides, E E, and regulating rod, F, one side or the other. E E, figure 1, are roller to move from one side of the bending frame to guides which can be detached when it is ne-

SARVEN'S PATENT WOOD BENDING MACHINE.

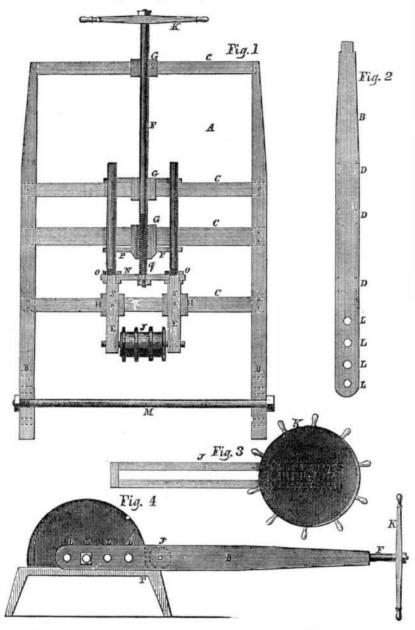

of inserting another by nuts, O O, figure 1. | sented by the dotted lines, it will be necessary, F, figure 1, is a regulating rod passing through while the machine is revolving, to turn the a threaded slide nut, G, a corresponding thread | lever wheel, K, in order always to keep the being cut on the rod, by which means the timber firmly pressed against the mold, by bending roller is raised or lowered by turning the hand wheel, K. S S, figure 1, represent thumb set screws, which prevent all lateral play of the slides and bending roller while the timber is being bent.

Operation.—Figure 4 shows the mold upon which the timber is to be bent; B is the bending frame pivoted at the point represented by the square in working position: the thumb screws, S S, figure 1, being tightened, the ends curve desired, whether regular or irregular, of the prepared material is inserted at T; the hand wheel, K, is now turned till the roller, J, then made to revolve around the mold until the timber is bent to their ends, which being fastened, the hand wheel is turned to loosen the roller, J, from pressure, the frame is turned back to its former position, the thumb screws loosened, and by pressing with one hand gently against the roller guide, and the other against the regulating rod, the roller is moved off the bent timber, the thumb screws are again tightened, and another set of timbers inserted and bent. These operations are repeated until the mold is filled with bent timber, the machine is then removed and can the inventor, Mr. James D. Sarven, of Colum- be applied to any number of molds required,

which means any irregularities in the mold may be overcome. If used in combination with a revolving mold, or a mold operated in any other manner, it performs equally well, and it may of course be placed either in a vertical or horizontal position.

From the peculiar construction of these machines, which admits of their being made of a size equally adapted to large or small establishments, their ready adaptation to all kind of wood, and the rapid manner in which they execute, it gives them advantages never before attained, to say nothing of their comparhighest class of work costing only \$50, from this upwards, according to size and capacity and number of rollers. A \$50 machine can be carried under the arm of a man having a tolerable good stretch in that direction. These machines are now in practical operation, and each machine guaranteed to perform as represented. For extra heavy work any desired power may be employed. All correspondents inquiring about machines, will please state the precise kind and quantity of timber they wish to bend.

Any other information desired may be obbia, Tenn., on the 20th of January last. It is but when the curve is not regulær, as repre- tained by addressing the patentee, as above.

Telegraph Cable Across the Hudson.

We know of no "suspension bridge" for any other purpose so light and long as the one which carries the electric fluid across the Hudson river at Fort Lee, in the upper part of this city. The proprietors of the various telegraph lines connecting New York with Philadelphia and the South bave expended \$50,000, to \$75,000 in erecting very tall masts on each side of the river at these points, stayed very firmly by wires extending in all directions landwards, and from their tops their wires are stretched at such hights as to clear the masts of vessels and the funnels of steamers on the river between. The clear span or stretch between the masts is about one mile. The wires so strained are of course liable to break with every severe gale, and there has lately been laid, in addition to one large cable, several years in use, two stout cables crossing at a point considerably below, judged to be better suited for the purpose. This indicates an increasing preference for this method of crossing rivers with important telegraph lines.

To Make Yellow ink.

This ink, sometimes useful in making pen and ink sketches, is prepared thus:-Take French berries, (a yellow berry sold by druggists), one ounce; alum half an ounce; rain or distilled water, half a pint; gum arabic, quarter of an ounce. Boil the whole together for about eight or ten minutes, then strain through fine muslin; when cold, it is fit for use. The berries may be obtained from drysalters.

Metholated spirit is a mixture of nine parts of alcohol and one part of wood naphtha.



Inventors, and Manufacturers

TWELFTH YEAR.

PROSPECTUS OF THE

SCIENTIFIC AMERICAN.

This work differs materially from other publications peing an ILLUSTRATED PERIODICAL, devoted chiefly to the promulgation of information relating to the vaious Mechanic and Chemic Arts, Industrial Manufactures, Agriculture, Patents, Inventions, Engineering, Millwork, and all interests which the light of PRACTICAL SCIENCE is calculated to advance.

The SCIENTIFIC AMERICAN is printed once a week, in convenient quarto form for binding, and presents an elegant typographical appearance. Every number contains Eight Large Pages, of reading, abundantly illustrated with ORIGINAL ENGRAVINGS—all of them engraved expressly for this publication.

All the most valuable patented discoveries are delinea ted and described in its issues, so that, as respects inventions, it may be justly regarded as an ILLUSTRATED REPERTORY, where the inventor may learn what has been done before him, and where he may bring to the world a KNOWLEDGE of his own achievements.

Mechanics, Inventors, Engineers, Chemists, Manufacturers, Agriculturists, and People of every Profession in Life, will find the SCIENTIFIC AMERICAN to be of great value in their respective callings.

REPORTS OF U. S. PATENTS granted are also published every week, including Official Copies of all the PATENT CLAIMS. These Claims are published in the Scientific American in advance of all other pa-

Its counsels and suggestions will save them Hundreds of Dollars annually, besides affording them continual source of knowledge, the experience of which is beyond pecuniary estimate.

Much might be added in this Prospectus, to prove that the SCIENTIFIC AMERICAN is a publication which every Inventor, Mechanic, Artisan, and Engineer in the United States should patronize; but the publication is so thoroughly known throughout the country, that we refrain from occupying further space.

TERMS OF SUBSCRIPTION-\$2 a year, or \$1 for

CLUB RATES.

Five Copies for Six Months, Five Copies for Twelve Months. 88 Ten Copiesfor Six Months, Ten Copies for Twelve Months. Fifteen Copies for Twelve Months, Twenty Copies for Twelve Months, 828 Forall Clubs of 20 and over, the yearly sub-

is only \$1.40. Post-pay allletters, and direct to
MUNN & CO...

128 Fulton street, New York.